

Quick Programming Instruction

M25S 24V motor

Duette®/Pleated Roof Blinds (PE models)

Colophon

This bulletin remains the property of Hunter Douglas. Its contents are strictly confidential and may not be reprinted, copied, reproduced or multiplied in whatever form. It must be returned upon request by Hunter Douglas.

The information presented in this manual serves to inform our customers. The manual is based upon general information concerning constructions, material properties and operating procedures as they are known to us at the moment of publication. That is why this manual is subject to change or additions at all times. Hunter Douglas reserves the right to make any changes and/or additions deemed necessary.


Because of the afore-mentioned reasons, this assembly manual is not a manual for installation, use or maintenance of products by Hunter Douglas®. If a user of products by Hunter Douglas® has any questions or experiences any difficulties during the use and/or maintenance of such products, Hunter Douglas should be contacted.

© - 2018 – Hunter Douglas Europe BV
® - Registered Trademark of Hunter Douglas
Printed in the Netherlands

Publication number
11-M-02EN-V10

Release date
12-02-2018

CONNECTING THE BLIND

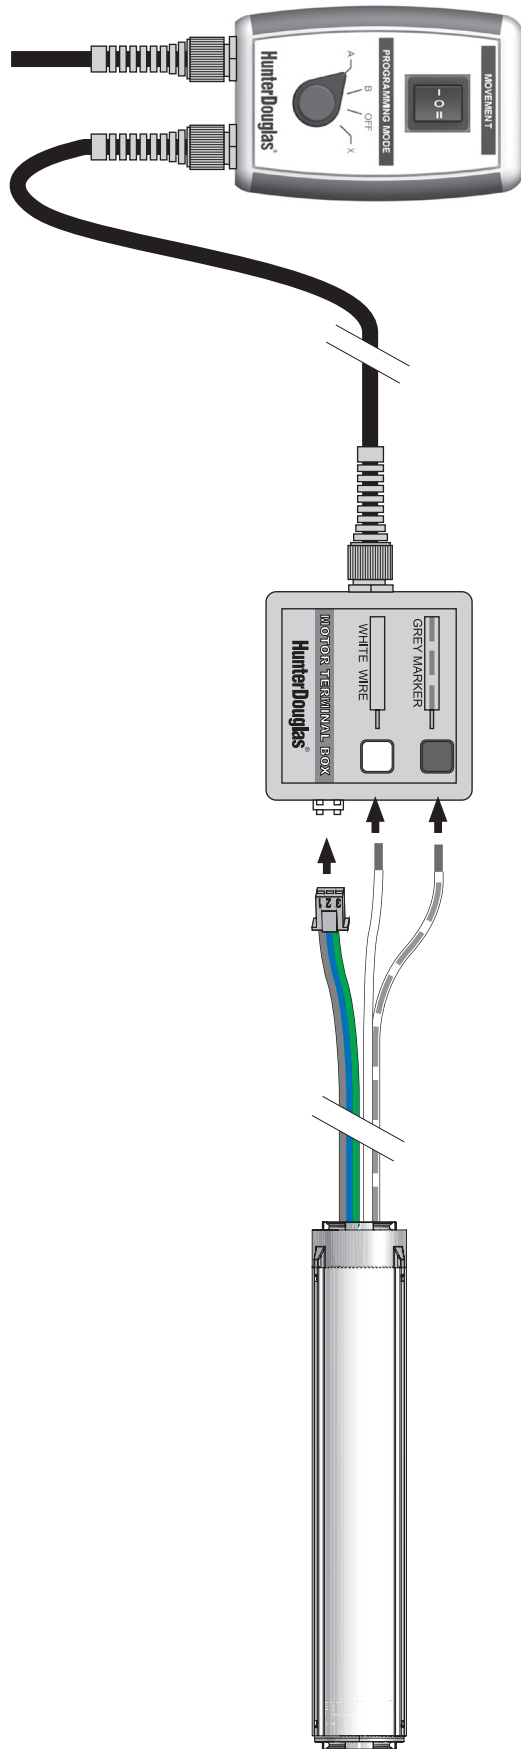


11-M-02EN-V10

01-F0710.0


LIMIT SETTINGS

① A = Top limit setting

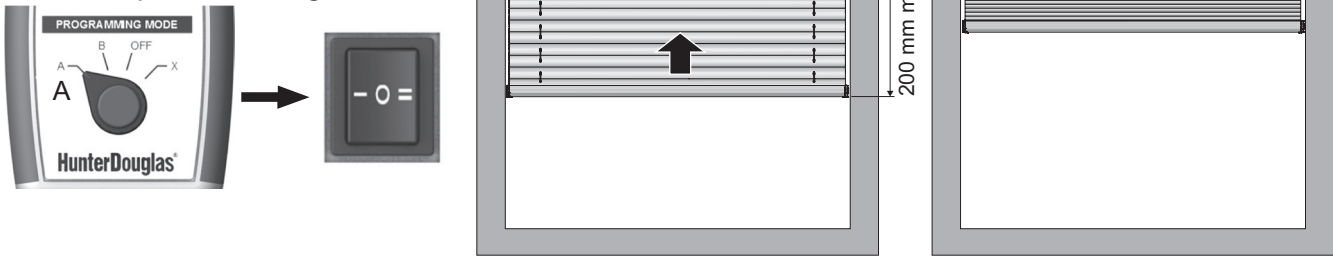


Blind must be down at least 200 mm before setting top limit.
Press I or II and hold until the blind stops by itself.

② B = Bottom limit setting

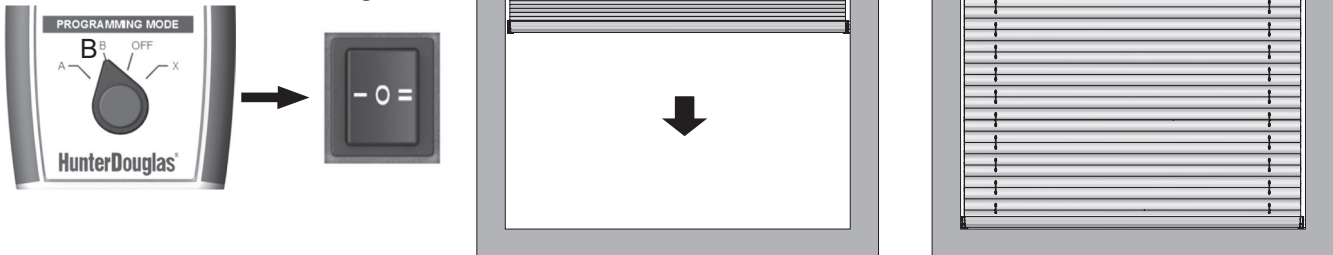

Press II or I until desired bottom limit is reached.

③ X = Roofblind setting

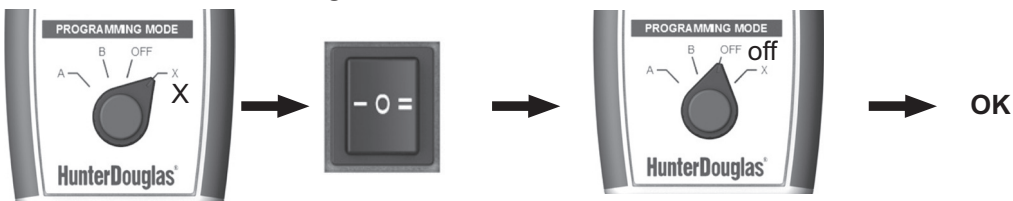


With blind in bottom position, press I or II for 1 second **IMPORTANT; Release button after 1 second**

④ Off = Normal operation



Press and hold I or II until the blind stops by itself in top position.

X = Factory reset

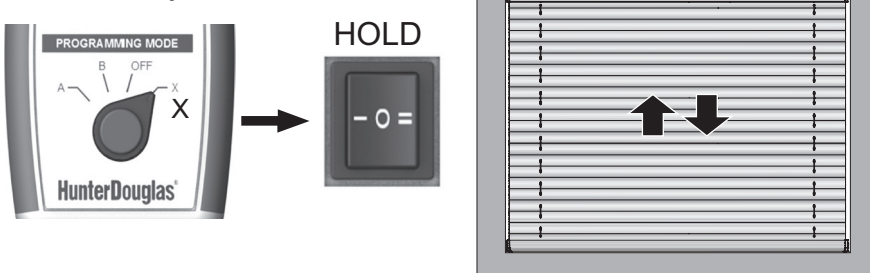

Press and hold I or II until the blind moves (for 5 seconds)

11-A0093.0